

Premier LED App

INSTALLATION GUIDE v2



1 Download the **Tuya Smart** app from your Google Play or Apple Store.




2 Verify Bluetooth is turned on and launch app.

Enter email address to Register, a code will be sent to verify the address.



3 Once the code is received, enter and continue

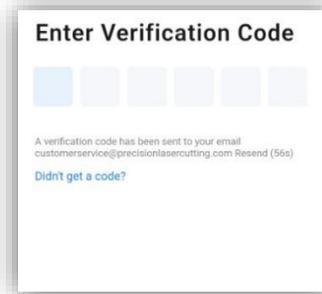


4 Create a Password.

Must be 6-20 Characters including letters and numbers.



5 Approve requested permissions.

Click Go to App

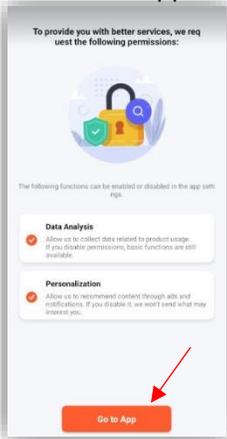

6 Add Device

Select the Plus Sign in the upper right corner



7 Power on the device and confirm that the light has already flashed/breathed.


The light will illuminate and dim in an inhale/exhale motion when connected.

If connected, continue to Step 8 then skip to Step 13

If not connected follow Reset Instructions on Steps 9-12

8 Select the item(s) to be added.


It will take a moment to add device then it will prompt stating Added Successfully.

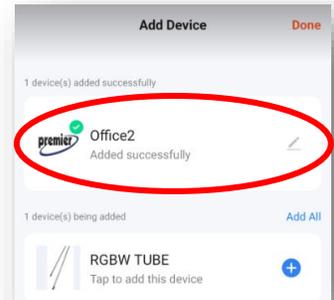

9 To **Reset**, follow the prompts:




10

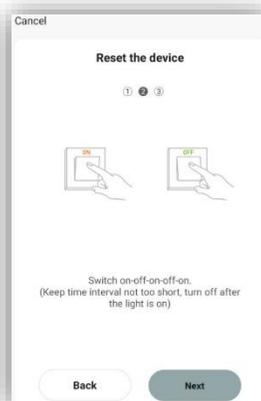

Power device on and off 3 times with 3 seconds between each interval.

11 The light will flash when it has been reset.

It should show you the devices available to pair.

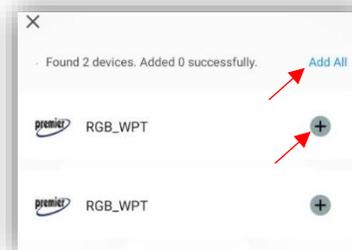


12 Select Add All or select individually the devices to pair and click "Next"

*If devices aren't found, repeat the Reset Process.


IMPORTANT!

It is important to power on and off 3 times. On for 3 seconds, off split second, on 3 sec, off split sec, on 3 sec until they flash or breath.

13 At this stage the option to rename them is available by selecting the small pencil icon.

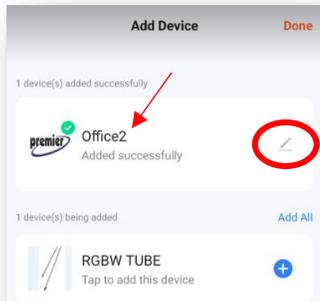

14 This screen will advise which devices are connect and powered on.

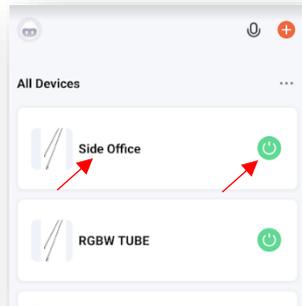


15 From there you can power on/off each device and adjust settings for each device.

To adjust **Settings** select the device by clicking the name.

There are pre-set profiles you can select and edit to create a custom color scene.

For more info on changing scenes, visit [LED Info on our website.](#)


Device Settings

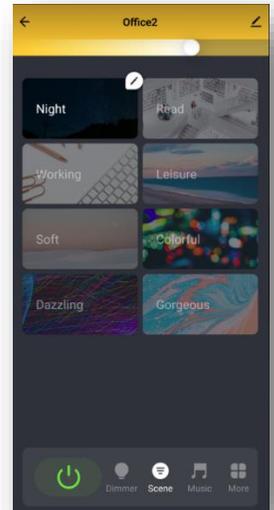

16 Add Bluetooth Wireless Gateway Hub


Confirm Wi-Fi signal is turned on and Hub is powered on.

Select the plus sign in upper right corner of home screen.

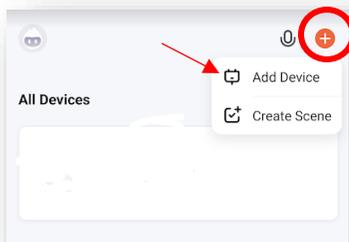


17 Select Gateway Control tab on the left. May need to scroll down slightly.

Select "Wireless Gateway (BLE)" Icon

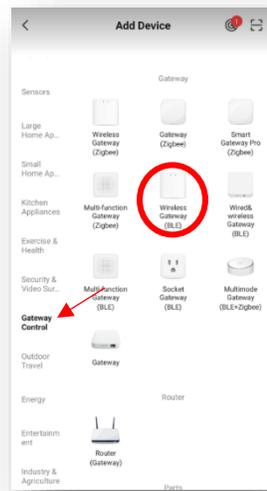


18 Power on the Hub and make sure the blue and red lights are blinking.

If lights are NOT blinking press and hold button on the side for a few moments then release.

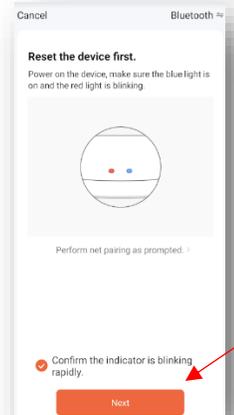


19 Available devices will show up.

Select "Bluetooth Mesh Gateway" by clicking the blue plus sign.

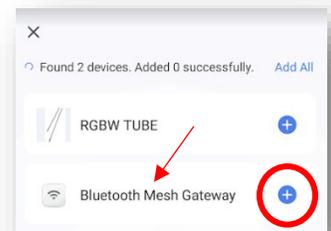

20 Enter in Wi-Fi password. Should receive notification that gateway is working.

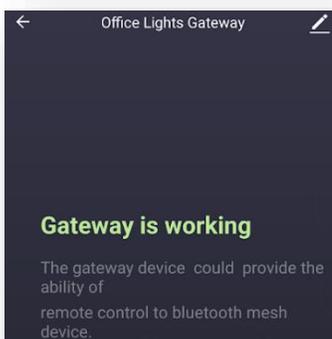

Tips

- Lights must be blinking or breathing to be added as a device.
- When resetting it is important to power ON-OFF-ON-OFF-ON-OFF-ON in 3 second intervals to put the light in pairing mode.
- A gateway hub is required for settings and schedules that utilize time of day, weather and music syncing.
- A gateway hub is required at each location that is on a different Wi-Fi network.
- Multiple hubs can be added and managed on the same app.
- It is good practice to re-name all devices, including hubs, to be location and placement specific.

More information on customizing color scenes and settings is available on [PremierCompaniesUSA.com](#)

For additional questions please call 888.539.3100 ext 301 or email customerservice@precisionlasercutting.com